



GENERAL INSTRUCTIONS

- 1- The mappings are indicative of the main decay phenomena present on the surface. These surface indicate the residual percentage of the area to be treated. **The price of the restoration works is however fixed at a flat rate.** After the installation of the scaffolding and before starting a restoration works, the contractor must carry out a survey of all the surfaces to verify and update the mappings.
- 2- **All the processes, of the materials and of the mortar must be tested on site, before being used, and submitted for approval by the works manager and UNCP's site manager.**
- 3- It is strictly forbidden to use concrete/masonry materials based on cement or with small pieces of cement.
- 4- The contractor must update the BIM model with all the data relating to the state of conservation and the work carried out, in order to deliver to the contracting authority an "as built" final state.

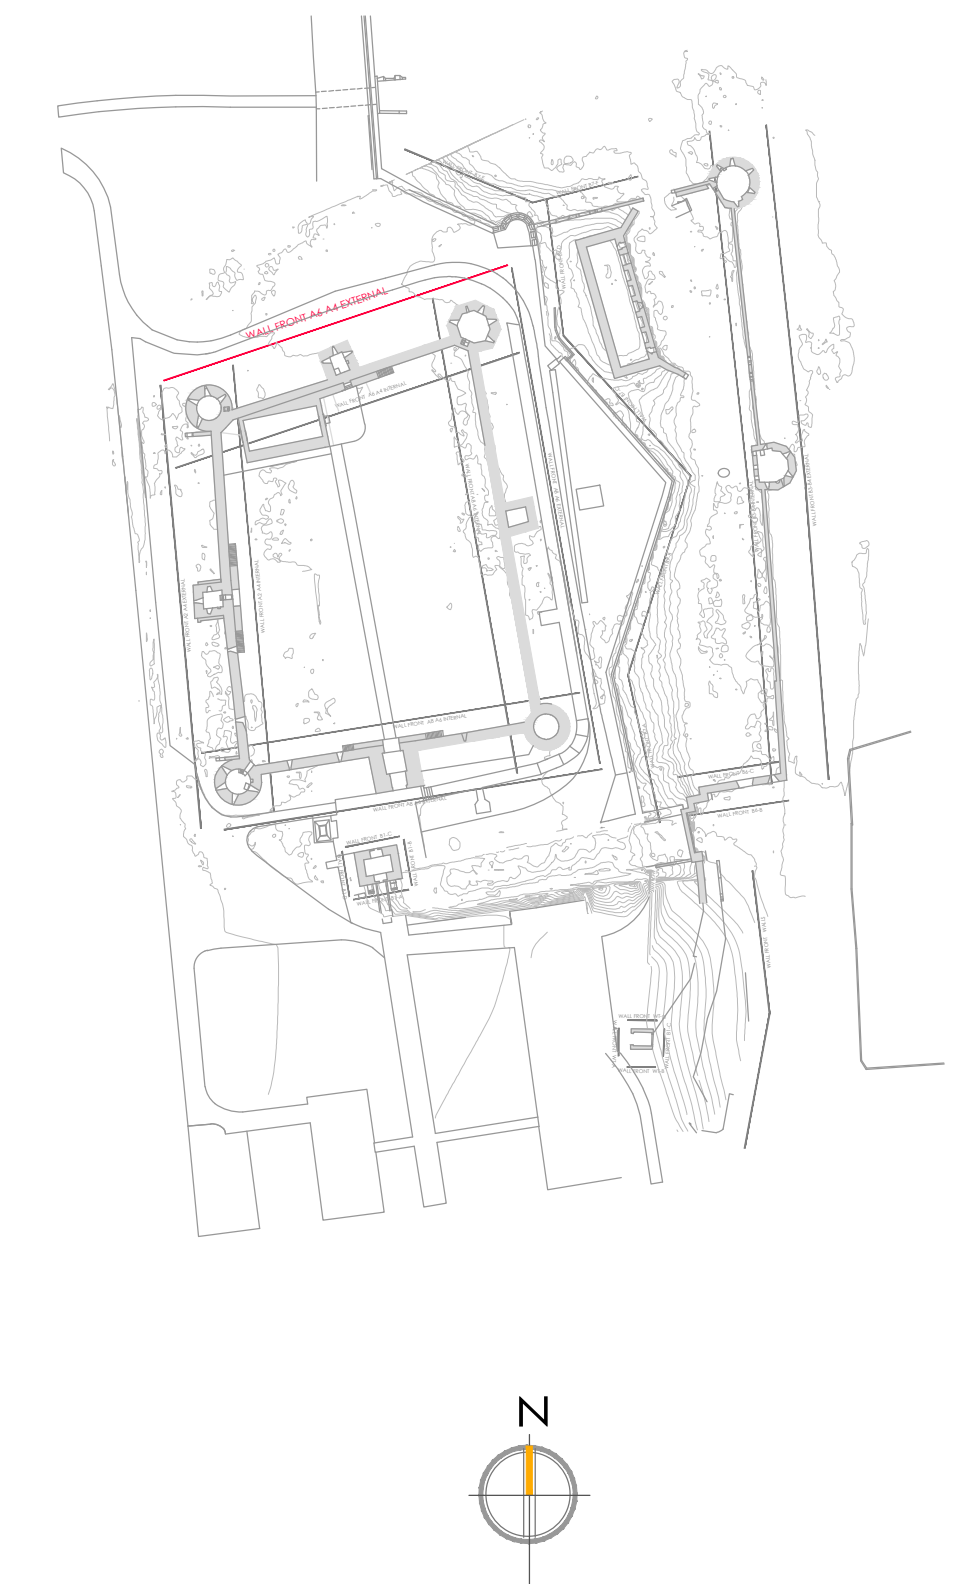

TITLE:						
RESTORATION INTERVENTIONS						
External Elevation Towers A6-A4 wall front						
ADDER CODE	PAYEE	FUNDS PROJ.	DISC. PROJ.	CHECKED	NUMBER	REV.
C226	- P	E R	003			
INTERNAL CODE C226_PAI_003 is Preliminary project						
REPRESENTATION SCALE: 1:50						
EXPERT STAMP AND SIGNATURE:						
<div style="text-align: center;">  Prepared by: _____ <small>The program is funded by the European Union and implemented by the United Nations Development Programme</small> </div>						